

高精度电容式油位传感器

CAPACITIVE FUEL LEVEL SENSOR

GLTV7

GaMicos

P 产品介绍 Product Introduction

GLTV7

GPS



P 产品特点 Product Features

- ◆ 1mm
- ◆
- ◆
- ◆
- ◆ SAE 5
- ◆
- ◆ GPS
- ◆

A 产品应用 Application


- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

S 技术参数 Specification

| 项目 | 参数 |
|----|----------------------------------|
| | 200~1500mm() |
| | : 0~5V 0.5~4.5V : RS232 RS485 |
| | DC10-32V 10~32VDC |
| | 1mm |
| | <15mA |
| | -40~+85 |
| | 5s/ |
| | PVC (PA) |
| | IP65 |
| | |
| | AMP |
| | SAE 5 5 M5 2mm NBR 2mm FPM |

接线方式





- Pin1(: VCC (10-32V)
- Pin2(: V out 0.5-4.5V/0-3.3V/0-8V/0-5V/ RX)
- Pin3(: GND
- Pin4(: /RS232TX/RS485A
- Pin5(:
- Pin6(:

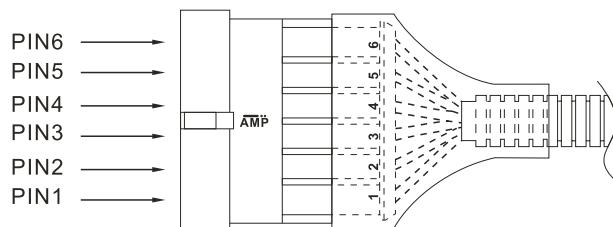

较准器

GLTV7 12V/23A

D 外形尺寸 Dimensions

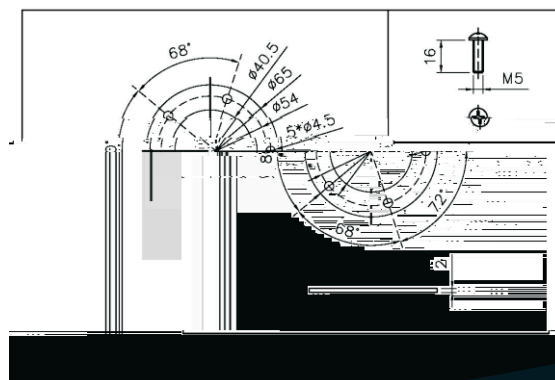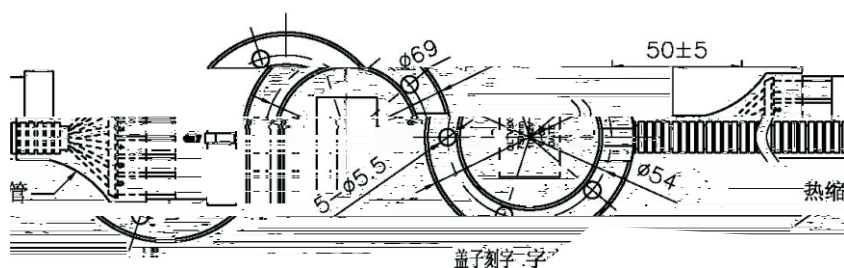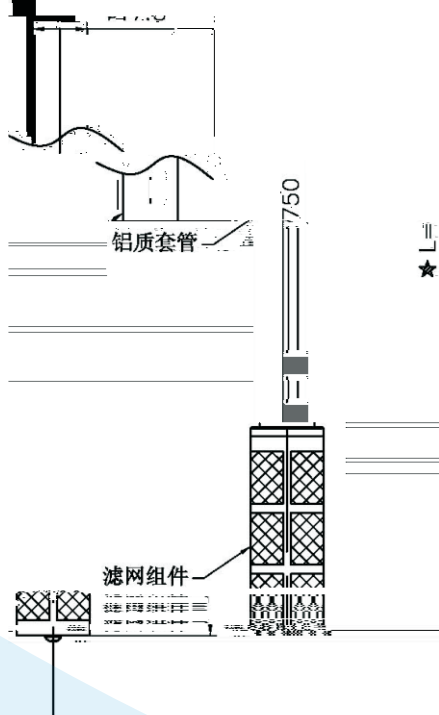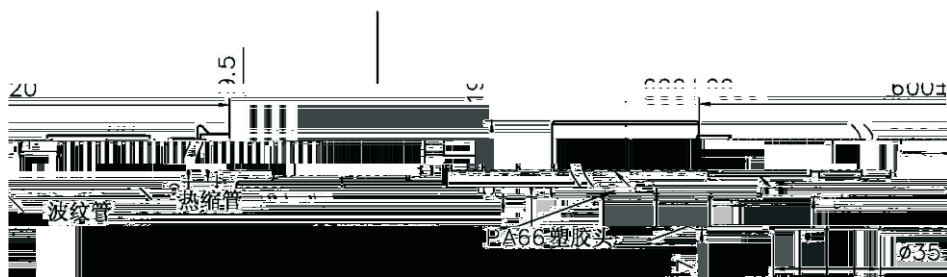

T 产品选型 Type selection

| GLTV7 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 选型说明 |
|-------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------|
| | F | | | | | | | |
| | | N | | | | | | mm |
| | | | X | | | | | 120~ 1500mm, |
| | | | | P1 | | | | RS485 |
| | | | | P2 | | | | RS232 |
| | | | | P3 | | | | 0.5~ 4.5VDC |
| | | | | P4 | | | | 0~ 5VDC |
| | | | | | V1 | | | 10~ 32VDC |
| | | | | | V2 | | | 5VDC |
| | | | | | | T1 | | |
| | | | | | | T2 | | |
| | | | | | | | J1 | |
| | | | | | | | J2 | |